


Product Guide



4-CH LIGHTING CONTROLLER



Model:CA-410
 Power supply: AC220~250V/50Hz
 Number of channels:4-CH
 Inductive load per channel:6.3A
 Maximum current:15A
 Dimensions(LXWXH):483X170X44mm
 Weight:2.6kgs

- * A new concept of four channels lighting controller. With stand-by button.
- * 6.3A inductive load per channel. Maximum current 15A. Output via 4 IEC-sockets.
- * Chaser selection via 4-fold switch. Chaser direction can be inverted.
- * Chaser auto-mode. Chaser-speed controllable via speed-control or sound-control.
- * Sound-controlled sensitivity adjustable via audio-control.
- * LED-display of all channels. Chase-function.
- * DMX-512 input and output. DMX- starting address adjustable via Dip-switches.
- * Fuse-holders on the back-panel.
- * 19"-rack dimensions with 1 unit.
- * CE approved.

GENERAL FUNCTIONS:

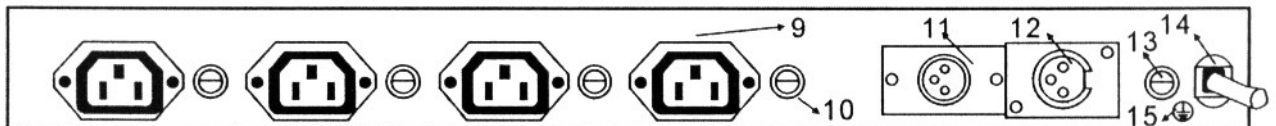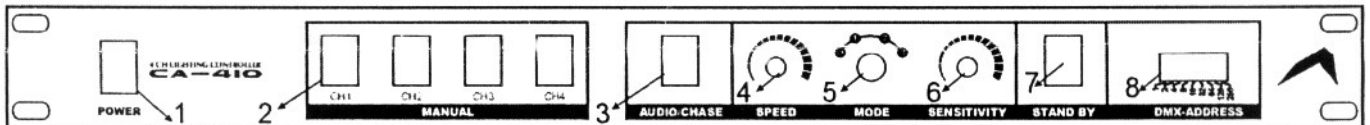

1. POWER SWITCH: ON/OFF
2. MANUAL SWITCH: controllers the four channels.
3. AUDIO/CHASE SWITCH: selectable AUDIO/CHASE mode.
When the switch to AUDIO, the green-LED indicates. When the switch to CHASE, the red-LED indicates.
4. SPEED KNOB: chase-speed controllable via speed-control.
5. MODE SELECT SWITCH: four selectable programs of AUDIO/CHASE mode (0,1,2,3).
6. SENSITIVITY KNOB: sound-sensitivity adjustable via knob.
7. STAND BY SWITCH: when this unit is in DMX pack mode, the STAND BY SWITCH is no usable.
8. DMX DIP SWITCH: DMX-512 address.
9. POWER OUTPUT SOCKETS: 4 IEC output socket.
10. INDIVIDUAL FUSE : of each channel: 6.3A/250V X4
11. DMX SIGNAL INPUT: XLR female socket.
12. DMX SIGNAL OUTPUT: XLR male socket.
13. FUSE HOLDER:1A/250V
14. POWER INPUT: AC 220~250V/50Hz
15. EARTH:

CAUTION:

- * Please confirm power input is matched with that specified on this unit.
- * Plug in power cord to turn the power on.
- * For safety, disconnect power cable when not using.
- * High voltage inside. Please don't open the fixture for any parts repair or replacement purpose while connecting with power.