


## Features:

- Two-way active speaker with one 10" woofer and one 1" driver.
- Cabinet is made from polypropylene and special high-tech material. It's durable, anti-shock and has good damping characters.
- Voice coil in the 10" woofer is made from  $\varnothing$  50mm copper cladding aluminium ribbon wire.
- Heavy duty protective grille.
- Rotatable  $90^\circ \times 60^\circ$  (HxV) dispersion horn makes it suitable for any performance purposes.
- Molded-in pole mount, easily suspended.
- Arrayable vertically in 4 layers or horizontally in more than 8 columns.




**Beta Three**

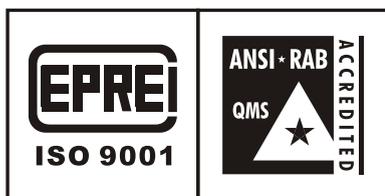

## Model: UIOa

### Technical Parameters

System:	Built-in crossover two way full range active speaker	
Driver Quantity:	10"x1(Bass)	1 x $\varnothing$ 34mm Driver
Frequency Response(-3dB):	55Hz-18KHz	
Frequency Response(-10dB):	50Hz-18KHz	
Max Sound Level(dB/1M):	117dB	
Level Adjust Range:	$\pm 10$ dB(100Hz)- Bass $\pm 10$ dB(10KHz)- Treb	
Output Power:	100W(Bass)+50W(Treb)	
Distortion:	Line-0.02%, Microphone-0.04%	
Tweeter Dispersion(HxV):	$90^\circ \times 60^\circ$	
Load Impedance:	Treb - 8Ohm, Bass - 8 Ohm	
Input Impedance:	Line - 20KOhm, Microphone - 10KOhm	
Connectors:	XLR K3P	
Power Supply:	AC 115V/230V, 50/60Hz	
Dimensions(WxDxH mm/pcs):	325X308X478mm	
Packing Dimensions(WxDxH mm/pcs)	375X355X535mm	
Net Weight(Kg/pcs):	10.5Kg	
Gross Weight(Kg/pcs):	11.8Kg	

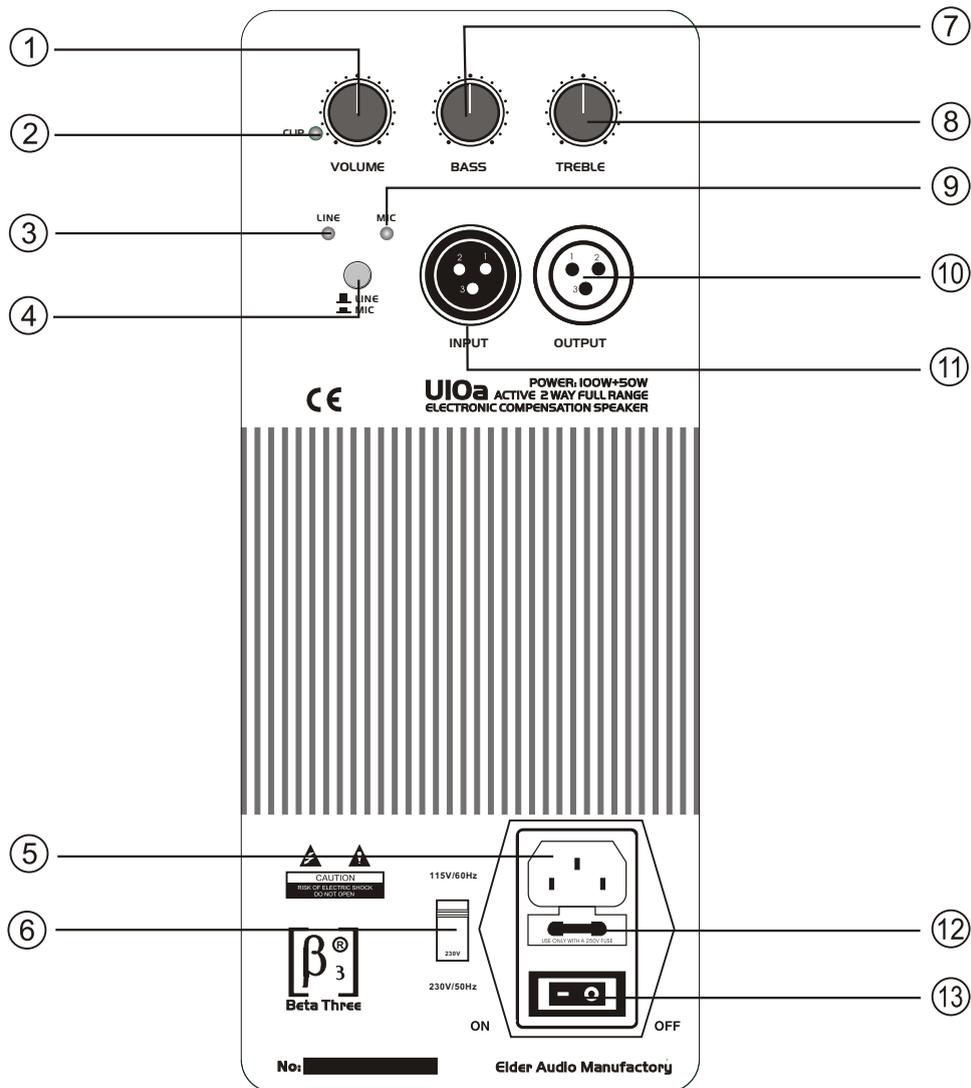

1. Volume control
2. Clip indicator.
3. Line input signal presence indicator.
4. Line/microphone selector.
5. Power supply input. Make sure that the voltage selector is set for your country's correct voltage.
6. 115V/230V voltage input selector.
7. Bass control.
8. Treble control.
9. Microphone input signal presence indicator.
10. Line/microphone output.
11. Line/microphone input.
12. Protection fuse. Use only fuses of the correct amp rating.
13. Power ON/OFF switch.

*Cosmetic changes may be made*