


Features:

- Active low frequency speaker with one 15" woofer.
- Cabinet is made from polypropylene and special high-tech material in large injection mold. It's durable, anti-shock and has good damping characters.
- Voice coil in the 15" woofer is made from $\varnothing 75\text{mm}$ copper cladding aluminium ribbon wire. Its efficiency is 20% higher than normal round wires.
- Heavy duty protective grille.




Beta Three

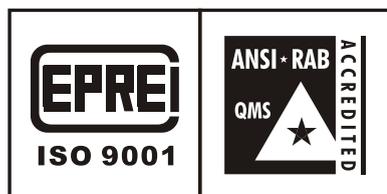

Model: UI5Ba

Technical Parameters

System:	Active low frequency speaker
Cabinet material:	Polypropylene, Trapezoid
Cabinet Colors:	Black, White, Blue, Gray
Drive Quantity:	1x15" (Bass)
High Cut Adjustable:	80Hz-250Hz
Max Sound Level(dB/1M):	120dB
Output Power:	400W
Distortion:	0.02%
Load Impedance:	4 Ohm
Input Impedance:	20 KOhm
Connectors:	XLR K3P
Power Supply:	AC 115V/230V, 50/60Hz
Dimensions(WxDxH mm/pcs):	485x460x700mm
Packing Dimensions(WxDxH mm/pcs)	545x515x800mm
Net Weight(Kg/pcs):	30.5Kg
Gross Weight(Kg/pcs):	33.7Kg

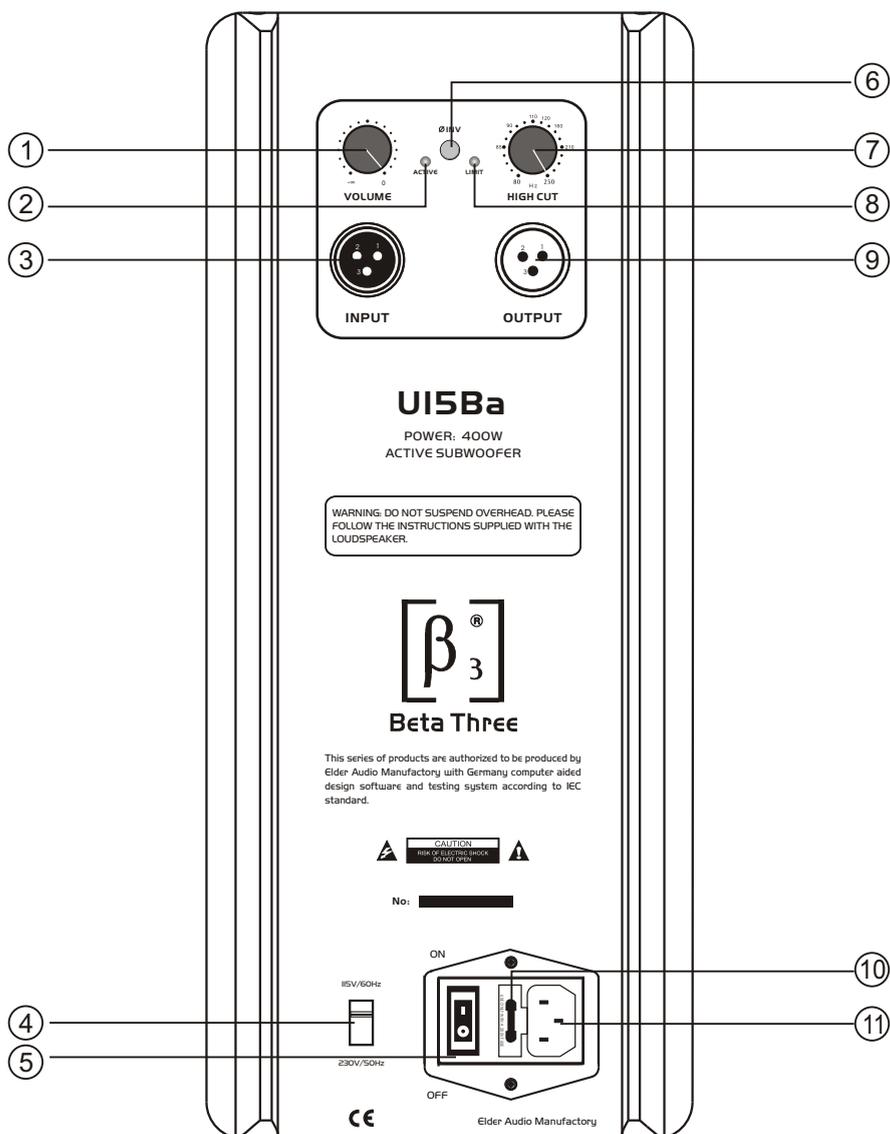

1. Volume control.
2. Active indicator.
3. Line/microphone input.
4. 115V/230V voltage input selector.
5. Power **ON/OFF** switch.
6. Phase inverting switch.
7. High cut.(80Hz~250Hz adjustable)
8. Limit indicator.
9. Line/microphone output.
10. Protection fuse.
11. Power supply input. Make sure that the voltage selector is set for your country's correct voltage.

Cosmetic changes may be made