


# Useries U110VI

## Two-way Loudspeaker System

The U110VI is a 10" two way full range speaker with clear and bright sound. Unit configuration: 1x10" high efficiency mid-bass unit, 1x1" exit throat 44mm polyimide diaphragm HF driver with 90°×50° rotatable horn. The cabinet is made of multilayer composite plywood with wear-resistant polyurea paint.




### CONFIGURATION

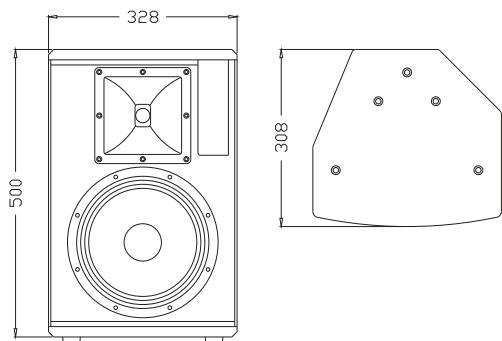

### FEATURES

- High quality unit configuration, high strength plywood housing
- Multi-hanging points and support, easy and quick operation
- Applications: large-scale indoor sound reinforcement, multifunction halls, high-end hotel clubs, touring, band reinforcement and monitor speaker

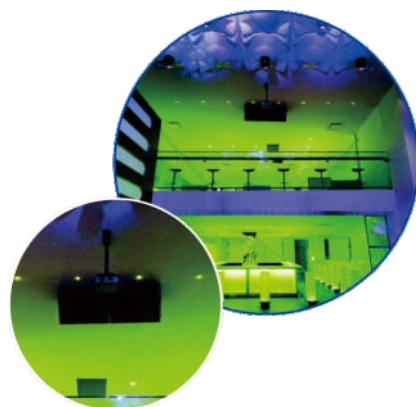

MODEL	U110VI
FREQUENCY RESPONSE(-3dB)	55 Hz-18kHz
FREQUENCY RESPONSE(-10dB)	50 Hz-20kHz
DRIVERS	1×10"(250mm)/2.5"voice coil LF 1×1"(25mm)/1.7"voice coil HF
RATED POWER	250W RMS,1000W peak
SENSITIVITY	95dB 1watt/1 metre
MAXIMUM SPL	119dB continuous,125 dB peak
IMPEDANCE	8 ohms nominal
DISPERSION(-6dB)	90°×50°
CROSSOVER FREQUENCIES	2kHz passive
INPUT CONNECTORS	2× Speakon NL4
PACKAGE SIZE	400mm×390mm×595mm
NET WEIGHT	15 kg/pc
GROSS WEIGHT	18 kg/pc